



technical specifications CRMSCcompact

general

- Reference-quality sound reproduction system with fully matched components
- 1:1 non-compressed linear response, with up to 90% less distortion
- 2" pro-ribbon HF driver with exceptional intelligibility and 1:16 dynamic output
- Unique hybrid front- /surround-system design for uniform sound stage
- SIS™ pre-wired for very high system damping and further reduced distortion
- Shallow system design (21,7 cm / 8.5-in.) for space economic mounting



description

The CRMSCcompact Cinema Reference Monitor System is a 3-way sound system, offering the most natural Digital Cinema and HD audio sound reproduction possible.

Featuring the patented RBN202 pro-ribbon driver, the CRMSC combines a remarkable clarity and intelligibility, with a unusually high headroom SPL. The Alcons pro-ribbon drivers have up to 90% less distortion than any conventional mid/high transducer, while the very high peak power handling offers a 1:15 RMS-to-peak ratio, enabling maximum screen compensations without any audible stress on the driver.

The patented horizontal dispersion of the RBN202 extends the stereo-imaging to a larger number of seats in the auditorium; Due to the "compression-

less" principle of the pro-ribbon transducer, the system has a linear response at any SPL.

Each CRMSCcompact system consists of a separate mid-high frequency section, featuring one RBN202 2" pro-ribbon driver HF with non-vented 6.5" midrange and vented 12" low frequency section with low power-compression 4" voice-coil design.

A matching surround system with identical MF/HF components is available, for perfect screen/surround blending, resulting in a very uniform sound stage.

For full system performance, the CRMSC is to be driven by either one or two channels of ALC controller-amplifier, delivering maximum sound quality and utmost operation reliability. The 4 ohms system impedance offers maximum amplifier efficiency.

The Signal Integrity Sensing™ pre-wiring ensures complete cable/connector compensation between the CRMSC and ALC, significantly increasing response accuracy, regardless of cable length and system impedance, with tight and accurate mid and bass response as result.


The combination of the outstanding sound reproduction quality and the digital dynamics

capability, make the system the ideal choice for high-end mix/screening rooms, post-production facilities, dubbing stages and quality-conscious Home Cinemas with a room depth less than 10 m / 30 ft.

As a result of Alcons' tight manufacturing standards, all system cabinets are within "matched pair" tolerance.

technical specifications CRMSCCompact

dimensional drawing

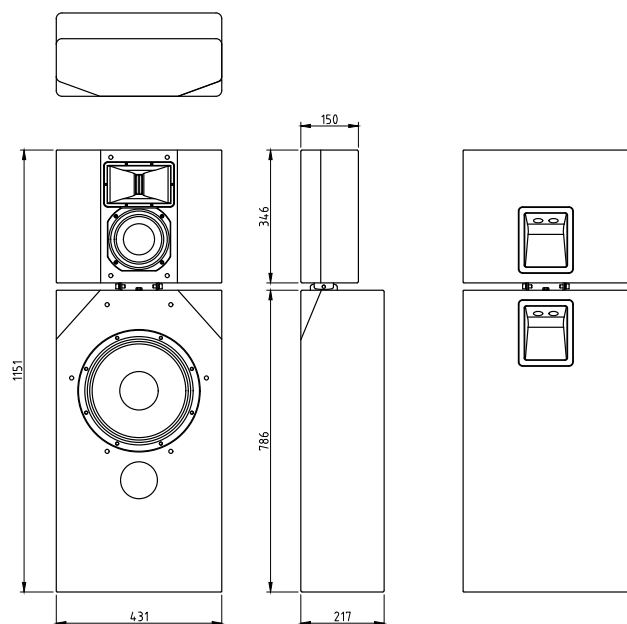

technical specifications

Frequency response	42 Hz - 20.000 Hz (+/- 3 dB)
	34 Hz - (+/- 10 dB)
Sensitivity nominal	94 dB (42 Hz - 200 Hz)
	99 dB (200 Hz - 10 kHz)
	99 dB (42 Hz - 10 kHz)
Nominal impedance	4 ohms / 4 ohms LF + 4 ohms MHF
Recommended drive	Sentinel3 min.
Nominal SPL peak	123 dB (Sentinel3 42 Hz - 200 Hz)
	127 dB (Sentinel3 200 Hz - 10 kHz)
	128 dB (Sentinel10 42 Hz - 200 Hz)
	132 dB (Sentinel10 200 Hz - 10 kHz)
	130 dB (Sentinel3 42 Hz - 10 Hz)
	135 dB (Sentinel10 42 Hz - 10 kHz)
Dispersion	H 90° x V 30° (@ 20 kHz)

physical specifications

System	3-way, full-range	
Filtering	passive or 2-way active	
Drivers LF (CRMSC sub)	1x AW12.4-4 12", vented	
Drivers MF (CRMSC top)	1x AMB6.5 6.5" non-vented	
Drivers HF (CRMSC top)	1x RBN202rs 2" pro-ribbon driver (passive)	
Connectors	2x Speakon NL4 input/link	
Physical dimensions CRMSC LF	mm	inches
Height	786	30.9
Width	431	17.0
Depth	217	8.5
Physical dimensions CRMSC MF/HF	mm	inches
Height	346	13.6
Width	431	17
Depth	150	5.9
Weight (approx.) CRMSCCompact	33,6 kg	74,1 lb
Warranty	6 years limited	

A: Alcons Audio B.V
De Corantijn 69
1689 AN ZWAAG
The Netherlands

E: info@alconsaudio.com
W: www.alconsaudio.com
T: +31 (0)229 28 30 90